

SPECIFICATIONS

M149



TOYO
TIRES

M149

The **M149** from Toyo Tires is a highway-rib, super-single tyre that can be used on trailer and steer axles for sealed-road applications.

The M149 has wide shoulder ribs and a flat crown radius for optimum wear and improved handling qualities when used on steer axles.



Features & Benefits



Wear-resistant tread compound

Slow-wear rate for medium and long haul applications.



Square footprint and flat crown radius

High degree of resistance to shoulder wear and other irregular wear. Excellent steering response and cornering grip.



Wide shoulder ribs with shallow grooves


Minimised tread flex at the tread shoulders for improved cornering grip and resistance to shoulder wear.



Rib-style tread pattern with wide circumferential grooves

Excellent directional stability and aquaplaning resistance.

Suitability

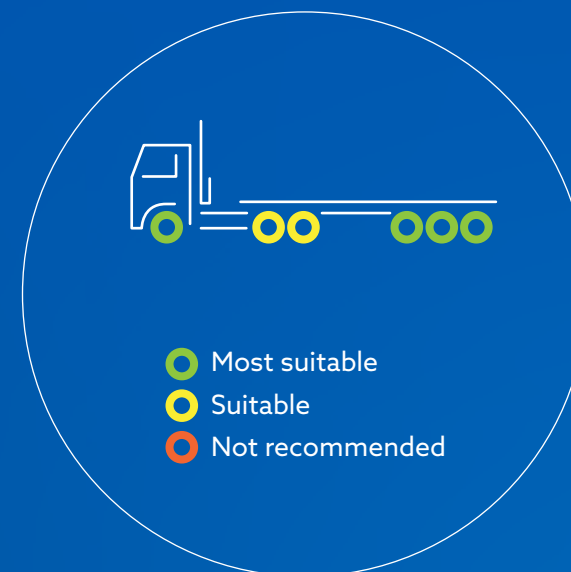

Size & Specifications

Tyre Size	Load/Speed Rating	Tread Depth (mm)	Inflated Dim.		Weight (kgs)	Max Load (kgs)	Max Cold Pressure (kPa)	Measuring Rim Width (inch)	Approved Rim Width Codes (inch)
			O.D. (mm)	O.W. (mm)					
385/65R22.5	160K	15.9	1079	376	74.5	4500	900	11.75	11.75 - 12.25

TOYO TIRES[®]



Find a dealer



1800 454 065



Toyo Tyre & Rubber Australia Limited
137-149 Airds Road, Minto, NSW 2566

Visit us at **toyotires.com.au**