

SPECIFICATIONS

M503Z



TOYO
TIRES

M503Z

The **M503Z** from Toyo Tires is a premium drive-axle radial tyre designed for on/off-road applications.

Its deep lug design is especially effective in muddy terrain and other harsh off-road conditions.



Features & Benefits



Cut and chip resistant tread compound

Resistance to tread cut and chipping damage and casing damage. Suitable for on/off road applications



High void ratio tread pattern


High levels of traction on unsealed surfaces. Cooler running temperatures on sealed roads



High elongation top-belt

Superior retreadability

Suitability

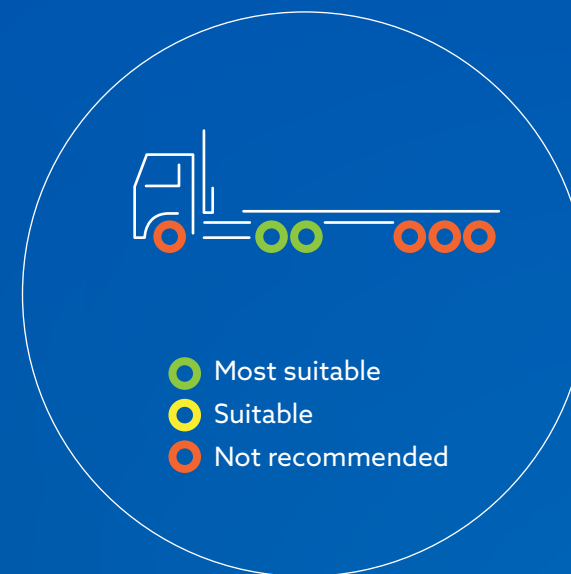

Size & Specifications

Tyre Size	Load/Speed Rating	Ply Rating	Tread Depth (mm)	Inflated Dim.		Weight (kgs)	Max Load (kgs)	Max Cold Pressure (kPa)	Measuring Rim Width (inch)	Approved Rim Width Codes (inch)
				O.D. (mm)	O.W. (mm)					
11R22.5	146K	16	20.6	1066	278	57.9	3000	825	8.25	7.5 - 8.25

TOYO TIRES[®]



Find a dealer



1800 454 065



Toyo Tyre & Rubber Australia Limited
137-149 Airds Road, Minto, NSW 2566

Visit us at **toyotires.com.au**