

SPECIFICATIONS

M605Z



TOYO
TIRES

M605Z

The **M605Z** from Toyo Tires is a tubeless, deep-tread, drive axle tyre.

It features an aggressive tread pattern, deep tread depth, and a tread compound suitable for mild mixed service applications.



Features & Benefits



Aggressive, traction tread pattern with open tread shoulder design

High levels of traction for high-torque prime movers on sealed and unsealed surfaces



Versatile, wear resistant tread compound


Long tread life and resistance to cutting & chipping damage in mild on or off-road applications



High-elongation cord top steel belt

Resistance to top belt damage and excellent retreadability

Suitability

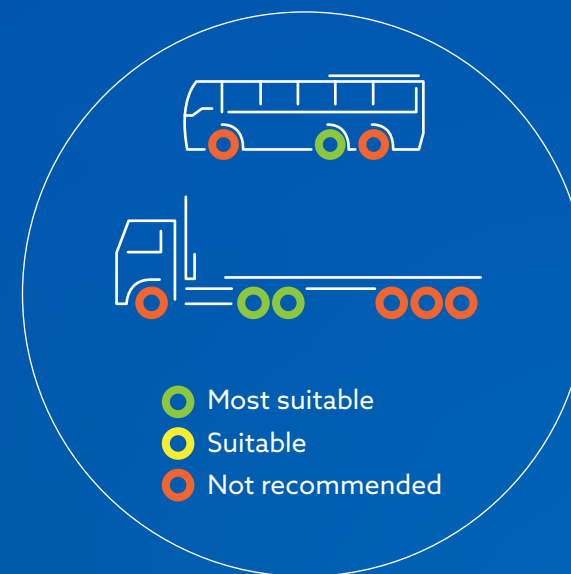

Size & Specifications

Tyre Size	Load/Speed Rating	Ply Rating	Tread Depth (mm)	Inflated Dim.		Weight (kgs)	Max Load (kgs)	Max Cold Pressure (kPa)	Measuring Rim Width (inch)	Approved Rim Width Codes (inch)
				O.D. (mm)	O.W. (mm)					
11R22.5	146K	16	20.6	1066	278	57.9	3000	825	8.25	7.5 - 8.25

TOYO TIRES[®]



Find a dealer



1800 454 065



Toyo Tyre & Rubber Australia Limited
137-149 Airds Road, Minto, NSW 2566

Visit us at **toyotires.com.au**