

SPECIFICATIONS

M143



TOYO
TIRES

M143

The **M143** from Toyo Tires is a tubeless, highway-rib truck/bus tyre suitable for all axle positions.

The M143 features wide tread width, wide shoulder ribs and a flat crown radius for optimum handling and improved wear qualities.

Steer axle – most suitable, drive axle – suitable, trailer – suitable.



Features & Benefits



Wear resistant, long-link carbon black tread compound

Excellent abrasion resistance for long tread life



Flat crown radius and wide tread profile

Even contact pressure for resistance to irregular wear and maximised removal life



Wide, rigid shoulder ribs


High levels of cornering grip and excellent resistance to shoulder wear



High-elongation cord top steel belt

Superior retreadability

Suitability

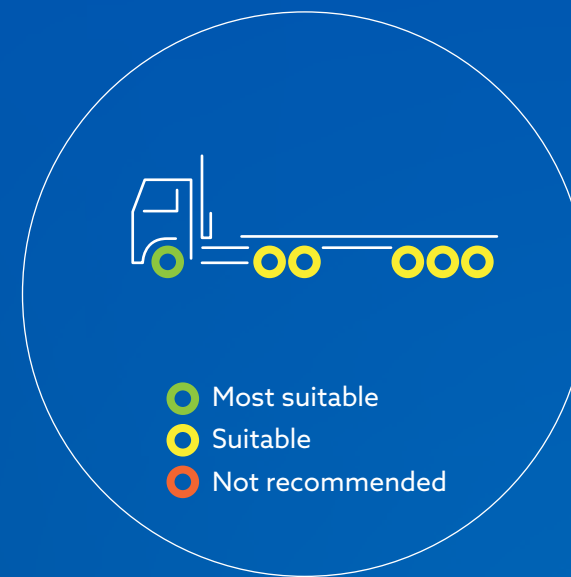

Size & Specifications

Tyre Size	Load Index	Tread Depth (mm)	Inflated Dim.		Weight (kgs)	Max Load (kgs)	Max Cold Pressure (kPa)	Measuring Rim Width (inch)	Approved Rim Width Codes (inch)
			O.D. (mm)	O.W. (mm)					
9.5R17.5	129L	11.6	838	230	30.2	1850	750	6.75	6.0 - 6.75
205/75R17.5	124M	12.1	761	202	25.0	1600	750	6	5.25 - 6.75
215/75R17.5	126M	12.5	776	212	26.5	1700	700	6	6.0 - 6.75
235/75R17.5	132M	13	802	233	29.3	2000	775	6.75	6.75 - 7.50

TOYO TIRES®



Find a dealer



1800 454 065



Toyo Tyre & Rubber Australia Limited
137-149 Airds Road, Minto, NSW 2566

Visit us at **toyotires.com.au**